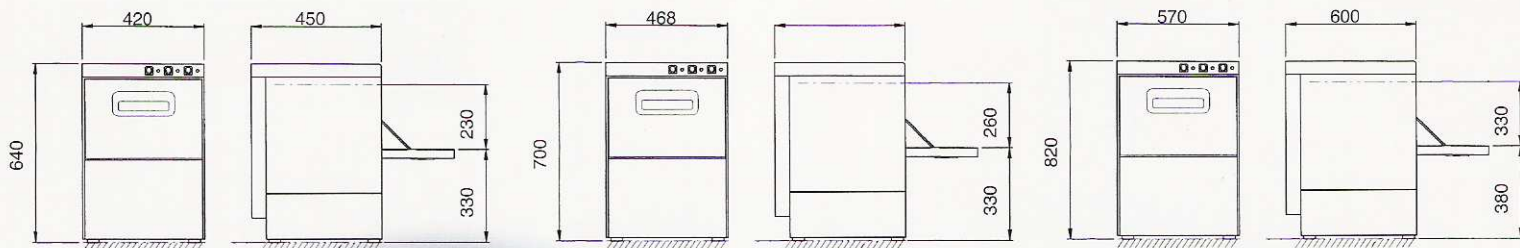


BE 35**BE 40****BE 50**
DATI TECNICI - TECHNICAL CHARACTERISTICS
CARACTERISTIQUES TECHNIQUES - TECHNISCHE DATEN
BE 35**BE 40****BE 50**

Peso netto - Net weight - Poids net - Netto Gewicht	kg 26	kg 32	kg 56
Dimensioni cesto - Basket sizes - Dimensions du panier - Maße Korb	mm 350 x 350	mm 400 x 400	mm 500 x 500
Altezza utile - Usable height - Hauteur utile - Gebrauchshöhe	23 cm	26 cm	33 cm
Durata cicli - Cycle lengths - Durée cycle - Zyklusdauer	min.' 2	min.' 2	min.' 3
Tensione di alimentazione 50Hz Std input voltage 50Hz Tension d'alimentation 50Hz Stromspannung 50Hz	V230~50Hz	V230~50Hz	V230~50Hz
Massima potenza assorbita: - Max absorbered power: Puissance absorbée max - Max Leistungsaufnahme	kW 3,2	kW 3,3	kW 3,6
Potenza pompa lavaggio - Power of wash pump Puissance pompe lavage - Leistung der Waschpumpe	kW 0,19	kW 0,30	kW 0,59
Potenza resistenza boiler/vasca Power of boiler/tank heating elements Puissance resistance surchauffeur/cuve Erwärmungselements Boiler/Becken	kW 3/1,3	kW 3/1,3	kW 3/3
Capacità boiler/vasca - Capacities of boiler/tank Capacité surchauffeur/cuve - Fassungsvermögen Boiler/Becken	ℓ 3,5/10	ℓ 3,5/14	ℓ 4,5/27
Temperatura risciacquo - Rinse water temperature Température eau rinçage - Wassertemperatur Nachspülung	85°C	85°C	85°C
Consumo acqua risciacquo - Rinse water consumption (2 bar) Consommation eau de rinçage - Wasserverbrauch Nachspülung	ℓ 2,5	ℓ 3	ℓ 3
Alimentazione acqua - Feed water Eau d'alimentation - Wasserzugang	50°C	50°C	50°C
Pompa scarico - Drain pump - Pompe de vidange - Laugenpumpe	a richiesta - on request - à la demande - auf anfrage		

DOTAZIONE

• 2 cesti

STANDARD EQUIPMENT

• 2 baskets

DOTATIONS

• 2 paniers

ZUBEHÖR

• 2 Körbe